
 UL 98, 600VAC, NFPA79,  
IEC 60947-1,-3 750VAC  
10,000 mechanical cycles ON;  
30A, 60A, 100A.

30 Amp ➔ 800Amp  
Fuse class J type.  
NEMA 4X Handles  
3P, 4 Pole Optional

**Heavy Duty**
**Compact**
**Modern Design**

Max Amps/ Fuse	Item# 3 Pole	List Each	Height mm/inch	Width mm/inch	Part # Includes adjustable shaft Depth: min- max.	Short Circuit  Rating at 600VAC
30 CC	FCC30A-*	\$235	116/4.6"	96/3.8"	5.4"-12"	100KA
30 J	FJ30A-*	\$250	116/4.56"	105/4.1"	5.4"-12"	100★KA
60 J	FJ60A-*	\$298	186/7.32"	150/5.9"	5.4"-12"	100KA
100 J	FJ100A-*	\$398	186/7.32"	150/5.9"	5.4"-12"	200KA
200 J	FJ200A-*	\$990	292/11.5"	197/7 <sup>3</sup> / <sub>4</sub> "	6.0"-16"	200KA
400 J	FJ400A-*	\$1,100	390/15.4"	259/10.2"	7.8"-13"	200KA
600 J	FJ600A-*	\$2,400	471/18.5"	364/14.4"	10.2"-20" (dim. inches)	200KA

\* Add Suffix to part# for handle type.

-**RG** = Red / Yellow Handle. Example FJ30-RG.

-**SI** = Black handle. Example: FJ30A-SI.

30A, 60A, 100A lugs supplied with disconnect.

★ 200KA Option (check website)


- Padlockable
- Pistol Grip Style
- NEMA 1, 12, 3R & 4X
- Handle length 5 1/2"

Options: 4 pole, Flange Handle, Side mount Handle Operators.

For Drawings.....


**Part # includes Shaft, handle and Switches**

1.




200mm  
Shaft

2.



NEMA 4X

3.



FJ60A + FJ100A

**Padlockable, by passable, double break contacts on all poles: isolates power from fuses when "off"**



# Power Disconnects

CE UL98

**UL** UL 98, 600VAC, NFPA79, IEC 60947-1,3  
10,000 Max. mechanical operations , 30A, 60A, 100Amp

30 Amp → 1200Amp  
Non - Fusible  
NEMA 4X Handles  
3P, 4 Pole Optional

**Heavy Duty      Compact      Modern Design**


Max Amps	Item# 3 Pole	List Each	Height mm/inch with shrouds	Width mm/inch	Adjustable Depth min- max.	Short Circuit Rating at 600VAC	HP		
							240V	480V	600V
30 4X	DISC30A-*	\$150	132/5 <sup>1</sup> / <sub>4</sub> "	78/3.1"	4"-14"	100KA	10	20	30
30 3R	DISC30A3R-*	\$120	With Economy NEMA 3R, 12 Handle						
100 4X	DISC100A-*	\$200	132/5 <sup>1</sup> / <sub>4</sub> "	78/3.1"	4"- 14"	★100KA@(480V)	30	60	75
100 3R	DISC100A3R-*	\$150	With Economy NEMA 3R, 12 Handle						
200 4X	DISC200A-*	\$450	294/11.6"	180/7.1"	7"- 18"	200KA	60	125	150
400 4X	DISC400A-*	\$860	400/15.8"	232/9"	7"- 18"	200KA	125	250	350
600 4X	DISC600A-*	\$1,400	460/18.2"	280/11"	11.4"- 18"	200KA	200	400	350
800 4X	DISC800A-*	\$2,100	460/18.2"	347/13 <sup>3</sup> / <sub>4</sub> "	11.4"- 18"	100KA	200	500	500
1,200	DISC1200A-*	\$2,500	460/18.2"	347/13 <sup>3</sup> / <sub>4</sub> "	11.4"- 18"	100KA			

\*Add Suffix to part# for handle type.  
 -**RG** = Red / Yellow Handle. Example DISC30A-RG.  
 -**SI** = Black handle. Example: DISC30A--SI.  
 30A, 60A, 100A lugs supplied with disconnect.

★25KA @ 600VAC  
 ● Padlockable  
 ● Pistol Grip Style  
 ● NEMA 4X  
 ● All dimensions approximate

Options: 4 pole, Flange Handle, Side mount Handle Operators, check website  
 For Drawings..... Min + Max Wire size 30A, 100A: AWG #12 → 2/0


**Non- Fusible**  
**Part # includes Shaft, handle and Switches**

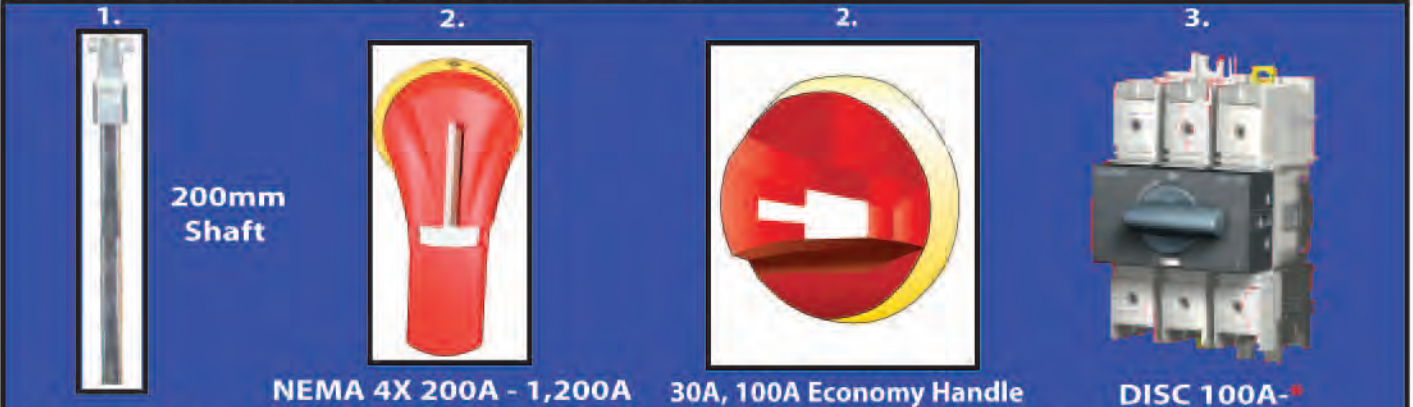



Padlockable, by passable, double break contacts on all poles: isolates power when "off"





## Accessories & Options For: UL98 Disconnects & Fusible Disconnects


Item	Description	Disconnect with Flange Handle*	Disconnect List price Increase	Spare Part Flange Handle Only
 <p>Flange Handle</p>	Flexible Cable 36"	Add - "FLAN-C"	+\$220	Item # FLAN-C \$220 With Cable
	Shaft Version for 6" Enclosure	Add - "FLAN-S-6"	+\$180	Item # FLAN-S-6 \$180 With Shaft
	8" - 24" Enclosure	Add - "FLANS-8"	+\$180	Item # FLAN-S-8 \$180
*Change Disconnect part #, example old # FJ30A-R changes to new # FJ30A-FLAN-C				

**No Flange handle for 200A + 400A See Factory**

	<b>To comply with NFPA79, UL508A For internal Lockout</b>  (Also used as Direct mount handle)	Amp Sizes	Item #	List price
		30A - 100A	FJ HANDLE 100A	\$32
200A - 400A	FJ HANDLE 400A	\$35		
600A - 800A	FJ HANDLE 800A	\$46		
	<b>Option:</b> <b>30 Amp Handle</b> <b>RED / Yellow</b> <b>60mm square 2.4" H+W</b>	Add - "XO" to Disconnect item #. Same list price  Item # Example : FJ30A-RG-XO \$250.00		

 <p>Auxiliary contacts can be field adjusted from 1N.O. 1N.C. to 2N.O or 2 N.C.</p>	Voltage	Amp	Item#	List price
	600VAC	10 A/AC-1	#FJ - AUX 4 max per Disconnect	\$40
	400VAC	8 A/AC-13		
	250VAC	10 A/AC-13		
	24VDC	14 A/DC-13		
	48VDC	6 A/DC-13		

 <p>Early Break Auxiliary 1N.O. or 1N.C.</p>	Amp	Item#	List price
	5 A/AC-1	FJ-EARLY-AUX-NO	\$12
	4 A/AC-13	FJ-EARLY-AUX-NC	\$12
	5 A/AC-13	FJ-EARLY 400A N.O + N.C. (for 200A + 400A)	\$12
	7 A/DC-13		
3 A/DC-13			

 <p>Finger safe terminals covers for <b>bottom</b> (load side) for all 3 poles</p>	Amp Size	Item#	List price
	30A, 60A	Supplied with disconnect	-
	100A	SHROUD100A	\$34
	200A	SHROUD200A	\$45
	400A	SHROUD400A	-
	600- 800A	SHROUD800A	\$70
<b>Top Line- side covers provided with disconnects</b>			

<b>One Box Lug per item# copper or aluminum cable</b>	Amp	wire size	Item#	List price
	100*	12-2/0	FJ-LUG 100A	\$10
	200	6-3/0	FJ-LUG 200A	\$12
	400-600	Two #2 - 600	FJ-LUG 400-600A	\$52
<b>All 30A + 60A Disconnects supplied with six lugs, copper wires only.</b> <b>*100Amp Non-Fusible supplied with 6 lugs</b>				