



Lighting Contactors

30A - 90 Amp Ballast 600 VAC
20A - 60 Amp Tungsten 277 VAC



Approvals



Technical Data

LS7K-04,- 4, -22, 00

30 Amp Ballast (600vac)
20 Amp Tungsten (277vac)

LS11K - 4,-22

30 Amp Tungsten (480vac)
30 Amp Ballast (277vac)

LS22K-3-

90 Amp Ballast (480vac)
60 Amp Tungsten (277vac)

Ambient Temperature

(Operational) -13°F - 131°F (-25°C / +55°C)

Torque / Wire size

LS7K-4-(15lbs. 14-10AWG)
LS11K-4-(16lbs. 14-8 AWG)
LS22K-3-(40lbs. 14-1/0 AWG)


Coil Consumption	Inrush	Holding
LS7K-4,-22 (AC)	45VA	6VA
LS7K-4,-22 (DC)	5.5W	5.5W
LS11K-4-(AC)	45VA	6VA
LS22-3-(AC)	191VA	17VA
LS11K-4-(DC)	5.5W	5.5W
LS22K-3-(DC)	125W	2.5W

Mounting Details Approx.

LS7K-04

Mounting Options

35mm or screw mount
(90° Intervals 360°)

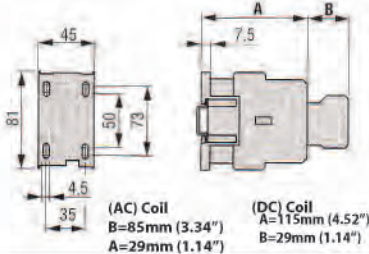


Dimensions Approximate

A=Top Mount
Auxiliary Adder


Part Number

LK-HS7K.01/10 - (Top Mount) Add
1.10" Depth
LK - HS8K.20 or .11(side mount) Add
.44" width

LS11K-4-4 Pole

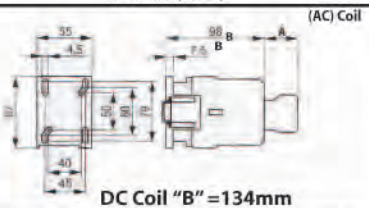

LS22K-3-3 Pole

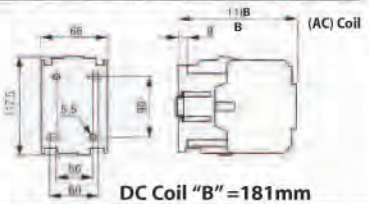

3 Pole / 4 Pole / 30 Amp Ballast, 20 Amp Tungsten

Pole	Catalog #	Poles		AC Coil	DC Coil	Enclosed NEMA 1 (metal) M1 Add
		N.O	N.C			
4 Pole	LS7K-04-*	0	4	\$100	NA	+\$69
4 Pole	LS7K-4-*	4	0	\$94	\$122	+\$69
4 Pole	LS7K-22-*	2	2	\$100	\$128	+\$69
3 Pole	LS7K.00-*	3	0	\$88	\$116	+\$69

4 Pole 30 Amp Tungsten / 30 Amp Ballast

4 Pole	LS11K-4-*	4	0	\$120	\$150	+\$69
4 Pole	LS11K-22-*	2	2	\$120	\$150	+\$69

3 Pole 60 Amp Tungsten / 90 Amp Ballast

3 Pole	LS22K-3-*	3	0	\$180	\$240	+\$69
--------	-----------	---	---	-------	-------	-------

To Order:

Replace Asterisk * in part number with coil voltage suffix in chart.

Example: LS11K - 4 - A=(120 VAC Coil)

For Accessories & Enclosures see p.65, 66

* Coil Voltage Chart

	AC 60Hz	50Hz Voltage
-G	24	24
-A	120	120
-B	200	200
-C	220	220
-H	277	230
-E	480	380
-F	600	500
*DC Add \$30 to list		
-MSW	12 VDC	
-NSW	24 VDC	
-OSW	48 VDC	
-PSW	110 VDC	
-RSW	220 VDC	