



LCIS - LUTZE Compact Interface Solutions Industrial Electromechanical & Solid State Relays

The LCIS relay product series offer compact, innovative terminal block style relays for a wide range of industrial applications. At a height of 68mm, LCIS relays are ideal for din rail mounting in low depth distribution enclosures.

- AC/DC Outputs
- Clear identification of terminal markings to reduce risk of wiring errors
- Push-in or screw termination available
- 6.2mm and 17.5mm housing width
- Operating range -25°C to $+60^{\circ}\text{C}$
- LED status indicator
- Pluggable or non-pluggable relay housing option
- Universal input/output relay mounting option
- 2 to 16 pole jumper accessories
- UL listed (#E135145)



LUTZE Inc.
13330 South Ridge Drive
Charlotte, North Carolina 28273

1-800-447-2371
info@lutze.com
www.lutze.com

LUTZE 
SYSTEMATIC TECHNOLOGY

Efficiency in Automation

Cable • Connectivity • Cabinet • Control



LCIS - LUTZE Compact Interface Solutions Electromechanical & Solid State Relays

Electromechanical relays:

- SPDT (1C/O)
- 6A max. output
- Input range 19.2...253 V AC/DC
- Dimensions 6.2x93x73mm
- Contact material AgSnO₂



		Input Voltage	Standard	Pluggable
Terminal	Screw	DC 24V	760020.0000	760020.1000
		AC/DC 24V	760021.0000	760021.1000
		AC/DC 115V	760051.0000	760051.1000
		AC/DC 230V	760061.0000	760061.1000
Push-in	Screw	DC 24V	761020.0000	761020.1000
		AC/DC 24V	761021.0000	761021.1000
		AC/DC 115V	761051.0000	761051.1000
		AC/DC 230V	761061.0000	761061.1000

Solid state relays:

- 1 NO contact
- 0.5A...5A max. output
- Dimensions 6.2x93x73mm
- 2 and 3 conductor version available

		Input Voltage	Output	Current	Part Number				
Screw	Push-in	11-30VDC	10-60VDC	0.5A	763020.0110	2-Conductor	Number of Conductors		
		11-30VDC	10-60VDC	2A	763020.0120				
		11-30VDC	20-264VAC	2A	763020.0220				
Screw	Push-in	11-30VDC	10-60VDC	0.5A	764020.0110			3-Conductor	Number of Conductors
		11-30VDC	10-60VDC	2A	764020.0120				
		11-30VDC	20-264VAC	2A	764020.0220				
Push-in	Screw	11-30VDC	10-30VDC	2A	763020.0320	3-Conductor	Number of Conductors		
		11-30VDC	10-30VDC	5A	763020.0330				
		110-230VAC/DC	10-30VDC	3A	763080.0350				
Push-in	Screw	11-30VDC	10-30VDC	2A	764020.0320			3-Conductor	Number of Conductors
		11-30VDC	10-30VDC	5A	764020.0330				
		110-230VAC/DC	10-30VDC	3A	764080.0350				

For complete LCIS product offering, refer to LCIS brochure or contact us.

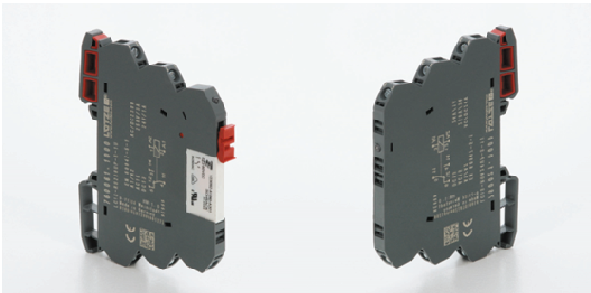

LUTZE Inc.
13330 South Ridge Drive
Charlotte, North Carolina 28273

1-800-447-2371
info@lutze.com
www.lutze.com

LUTZE 
SYSTEMATIC TECHNOLOGY