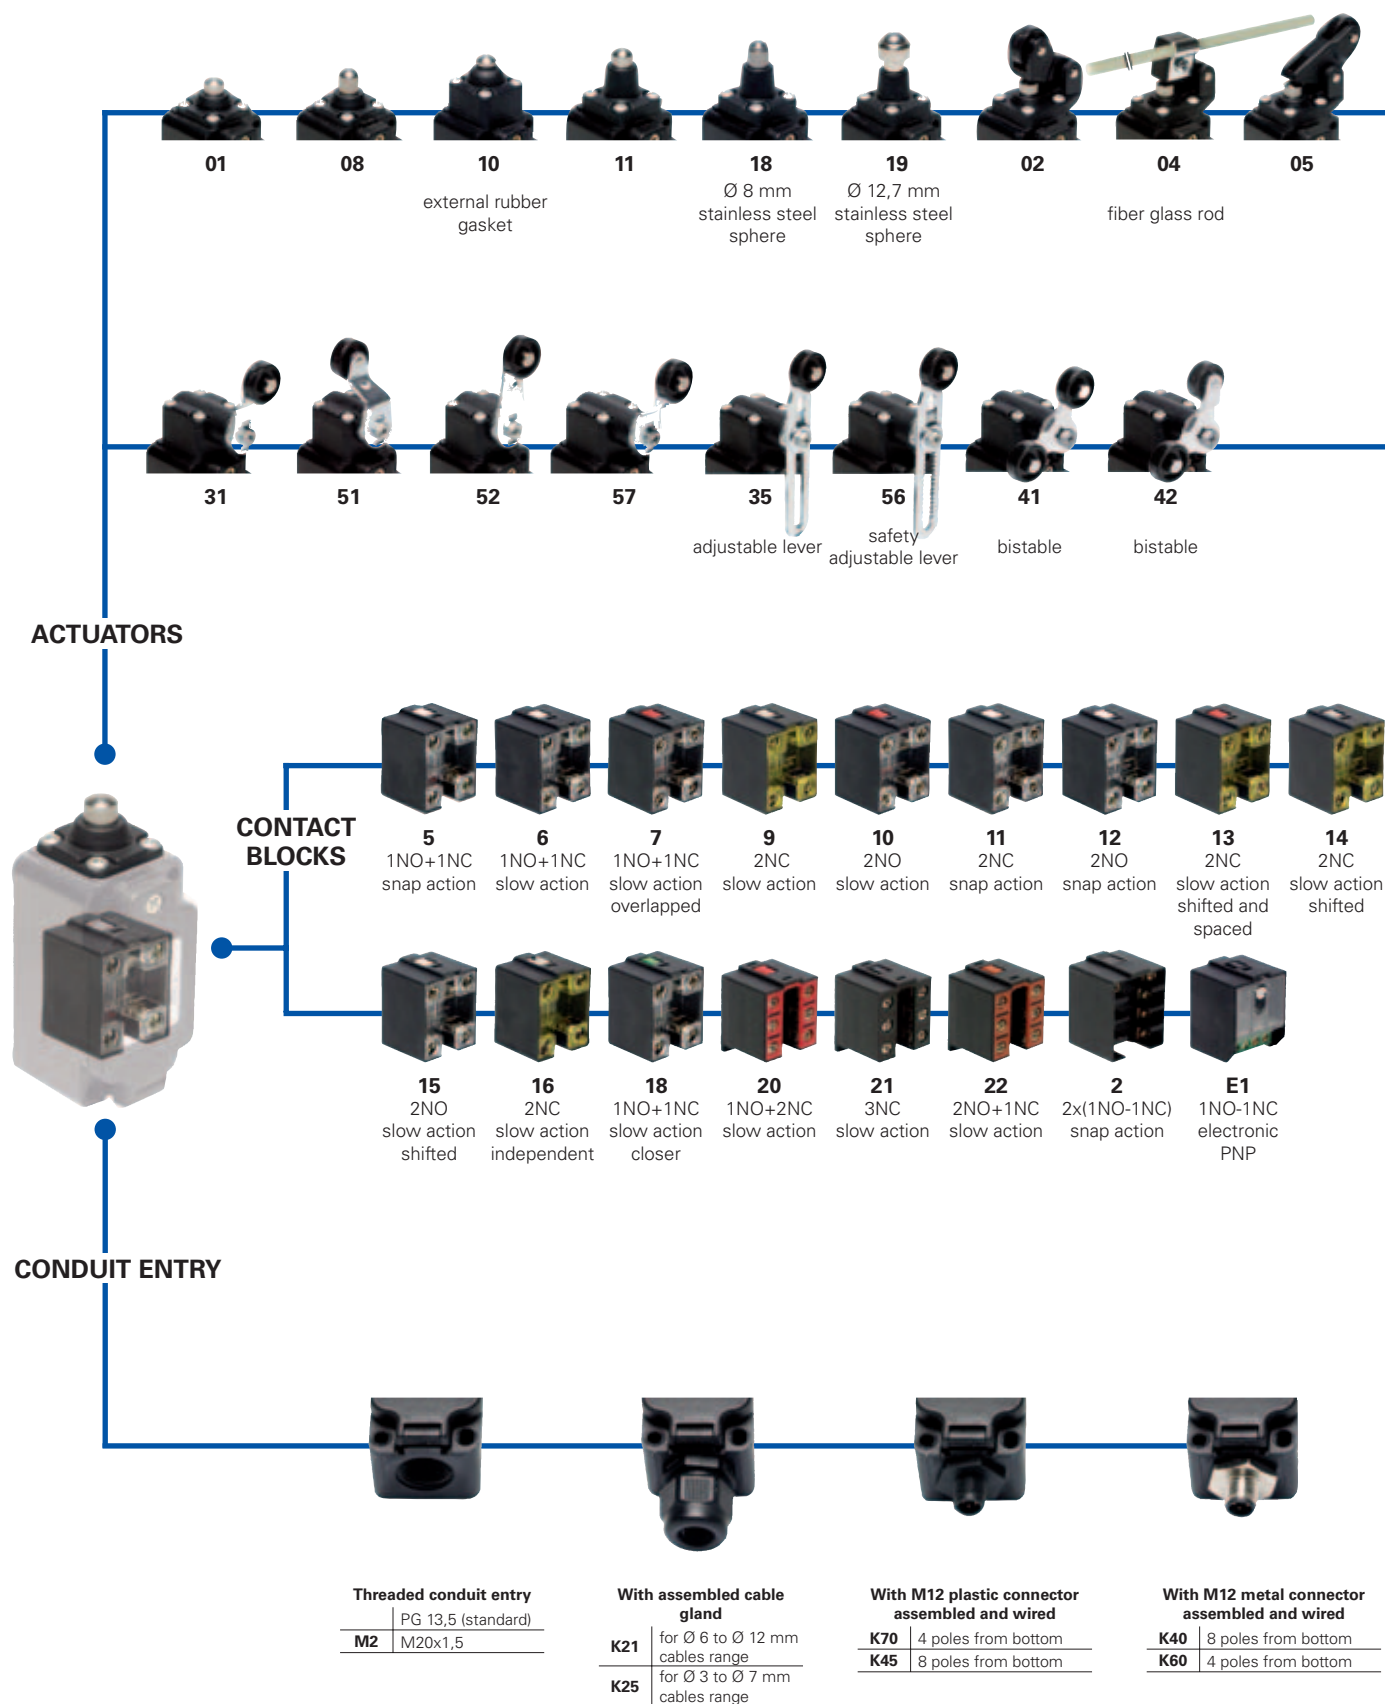
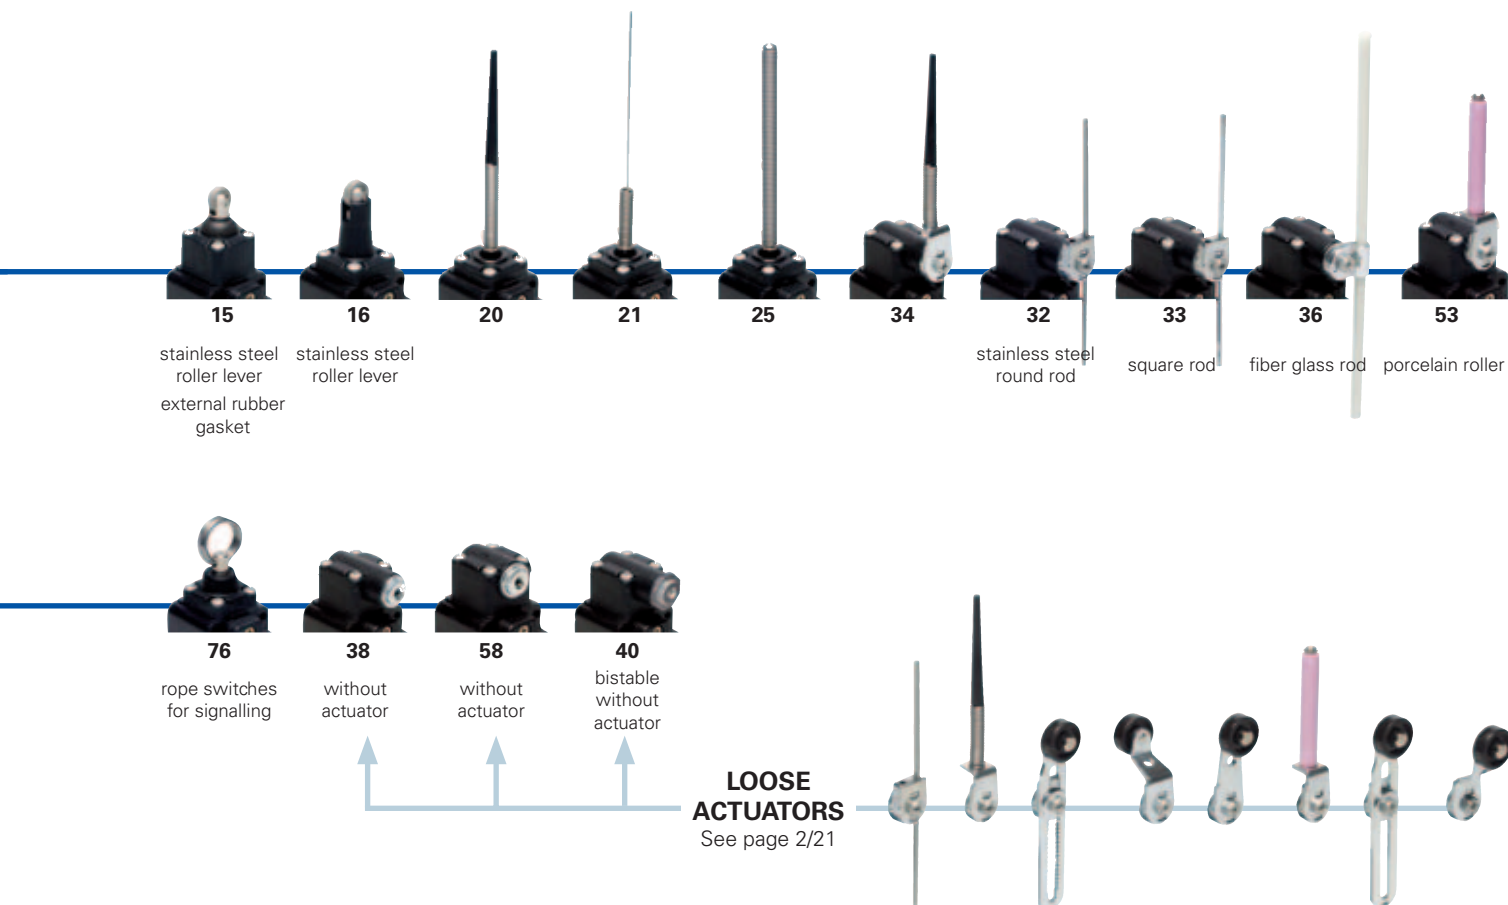


## Selection diagram



—●— product option  
 —→— accessory sold separately



## Code structure

**Attention!** The feasibility of a code number does not mean the effective availability of a product. Please contact our sales office.

| article                                                                                                                                                                                                                                                                                                                                                                                               |  | options                                                                                                                                                                                                                                  |  |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|
| FP 502-1GM2K70                                                                                                                                                                                                                                                                                                                                                                                        |  |                                                                                                                                                                                                                                          |  |
| <b>Housing</b><br><b>FP</b> polymer housing, one conduit entry                                                                                                                                                                                                                                                                                                                                        |  | <b>Preinstalled cable gland or connectors</b><br>no cable gland or connector (standard)<br><b>K21</b> with assembled cable gland suitable for Ø 6 to Ø 12 mm cables range<br>...<br><b>K70</b> with 4 poles M12 plastic connector<br>... |  |
| <b>Contact blocks</b><br><b>5</b> 1NO+1NC, snap action<br><b>6</b> 1NO+1NC, slow action<br><b>7</b> 1NO+1NC, slow action overlapped<br>...                                                                                                                                                                                                                                                            |  | <b>Threaded conduit entry</b><br>PG 13,5 (standard)<br><b>M2</b> M20x1,5                                                                                                                                                                 |  |
| <b>Actuators</b><br><b>01</b> short plunger<br><b>02</b> roller lever<br><b>05</b> offset roller lever<br>...                                                                                                                                                                                                                                                                                         |  | <b>Contacts type</b><br>silver contacts (standard)<br><b>G</b> silver contacts gold plated 1 µm (contact block 2 excluded)                                                                                                               |  |
| <b>Suffix</b><br>no suffix (standard)<br><b>1</b> with Ø 20 mm stainless steel roller for actuators 02, 05, 31, 35, 51, 52, 56, 57<br><b>2</b> with Ø 35 mm polymer roller (see special loose actuators on page 2/22)<br><b>3</b> with Ø 50 mm rubber roller (see special loose actuators on page 2/22)<br><b>4</b> with Ø 50 mm overhanging rubber roller (see special loose actuators on page 2/22) |  |                                                                                                                                                                                                                                          |  |



### Main data

- Polymer housing, one conduit entry
- Protection degree IP67
- 17 contact blocks available
- 28 actuators available
- M12 assembled connector versions
- Silver contacts gold plated versions

### Markings and quality marks:



Approval IMQ: EG606  
 Approval UL: E131787  
 Approval CCC: 2007010305230014  
 Approval ECU: 1010151

### Technical data

#### Housing

Made of glass-reinforced polymer, self-extinguishing, shock-proof thermoplastic resin and with double insulation

One threaded conduit entry

Protection degree: IP67 according to EN 60529

#### General data

Ambient temperature: from -25°C to +80°C

Version for operation in ambient temperature from -40°C to +80°C on request

Max operating frequency: 3600 operations cycles<sup>1</sup>/hour

Mechanical endurance: 20 million operations cycles<sup>1</sup>

Assembling position: any

Driving torque for installation: see pages 6/1-6/10

(1) One operation cycle means two movements, one to close and one to open contacts, as foreseen by EN 60947-5-1 standard.

#### Cross section of the conductors (flexible copper wire)

|                                                            |      |                          |              |
|------------------------------------------------------------|------|--------------------------|--------------|
| Contact blocks 20, 21, 22, 33, 34:                         | min. | 1 x 0,34 mm <sup>2</sup> | (1 x AWG 22) |
|                                                            | max. | 2 x 1,5 mm <sup>2</sup>  | (2 x AWG 16) |
| Contact blocks 5, 6, 7, 9, 10, 11, 12, 13, 14, 15, 16, 18: | min. | 1 x 0,5 mm <sup>2</sup>  | (1 x AWG 20) |
|                                                            | max. | 2 x 2,5 mm <sup>2</sup>  | (2 x AWG 14) |
| Contact block 2:                                           | min. | 1 x 0,5 mm <sup>2</sup>  | (1 x AWG 20) |
|                                                            | max. | 2 x 1,5 mm <sup>2</sup>  | (2 x AWG 16) |

#### In conformity with standards:

IEC 60947-5-1, EN 60947-5-1, EN 50041, IEC 60204-1, EN 60204-1, EN 1088, EN ISO 12100-1, EN ISO 12100-2, IEC 60529, EN 60529, NFC 63-140, VDE 0660-200, VDE 0113, CENELEC EN 50013.

#### Approvals:

IEC 60947-5-1, UL 508, GB14048.5-2001

#### In conformity with requirements requested by:

Low Voltage Directive 2006/95/EC, Machinery Directive 2006/42/EC and Electromagnetic Compatibility 2004/108/EC.

#### Positive contact opening in conformity with standards:

IEC 60947-5-1, EN 60947-5-1, VDE 0660-206.

### Installation for safety applications:

Use only switches marked with the symbol . The safety circuit must always be connected with the **NC contacts** (normally closed contacts: 11-12, 21-22 or 31-32) as stated in the **standard EN 60947-5-1, encl. K, par. 2**. The switch must be actuated with **at least up to the positive opening travel** shown in the travels diagrams on page 6/4. The switch must be actuated **at least with the positive opening force**, shown in brackets, underneath each article, near the value of the min. force.

**If not expressly indicated in this chapter, for the right installation and the correct utilization of all articles see requirements indicated from page 6/1 to page 6/10.**

| Electrical data            |                                             | Utilization categories                |                                      |     |     |
|----------------------------|---------------------------------------------|---------------------------------------|--------------------------------------|-----|-----|
| without connector          | Thermal current (I <sub>th</sub> ):         | 10 A                                  | Alternate current: AC15 (50...60 Hz) |     |     |
|                            | Rated insulation voltage (U <sub>i</sub> ): | 500 Vac 600 Vdc                       | U <sub>e</sub> (V)                   | 250 | 400 |
|                            |                                             | 400 Vac 500 Vdc                       | I <sub>e</sub> (A)                   | 6   | 4   |
|                            | Conditional short circuit current:          | for contact blocks 20, 21, 22, 33, 34 | Direct current: DC13                 |     |     |
|                            |                                             | 1000 A according to EN 60947-5-1      | U <sub>e</sub> (V)                   | 24  | 125 |
| with 4 poles M12 connector | Protection against short circuits:          | fuse 10 A 500 V type aM               | I <sub>e</sub> (A)                   | 6   | 1,1 |
|                            | Pollution degree:                           | 3                                     |                                      |     |     |
|                            | Thermal current (I <sub>th</sub> ):         | 4 A                                   | Alternate current: AC15 (50...60 Hz) |     |     |
|                            | Rated insulation voltage (U <sub>i</sub> ): | 250 Vac 300 Vdc                       | U <sub>e</sub> (V)                   | 24  | 120 |
|                            |                                             |                                       | I <sub>e</sub> (A)                   | 4   | 4   |
| with 8 poles M12 connector | Protection against short circuits:          | fuse 4 A 500 V type gG                | Direct current: DC13                 |     |     |
|                            | Pollution degree:                           | 3                                     | U <sub>e</sub> (V)                   | 24  | 125 |
|                            | Thermal current (I <sub>th</sub> ):         | 2 A                                   | I <sub>e</sub> (A)                   | 4   | 1,1 |
|                            | Rated insulation voltage (U <sub>i</sub> ): | 30 Vac 36 Vdc                         | Alternate current: AC15 (50...60 Hz) |     |     |
|                            |                                             |                                       | U <sub>e</sub> (V)                   | 24  |     |
|                            | Protection against short circuits:          | fuse 2 A 500 V type gG                | I <sub>e</sub> (A)                   | 2   |     |
|                            | Pollution degree:                           | 3                                     | Direct current: DC13                 |     |     |
|                            | Thermal current (I <sub>th</sub> ):         | 2 A                                   | U <sub>e</sub> (V)                   | 24  |     |
|                            | Rated insulation voltage (U <sub>i</sub> ): | 30 Vac 36 Vdc                         | I <sub>e</sub> (A)                   | 2   |     |
|                            |                                             |                                       |                                      |     |     |



## Data type approved by IMQ, CCC and EZU

Rated insulation voltage (Ui): 500 Vac  
400 Vac for contact blocks 20, 21, 22, 33, 34

Thermal current (Ith): 10 A

Protection against short circuits: fuse 10 A 500 V type aM

Protection degree: IP67

MV terminals (screw clamps)

Pollution degree 3

Utilization category: AC15

Operation voltage (Ue): 400 Vac (50 Hz)

Operation current (Ie): 3 A

Forms of the contact element: Za, Zb, Za+Za, Y+Y, X+X, Y+Y+X, Y+Y+Y, Y+X+X

Positive opening of contacts on contact block 5, 6, 7, 9, 11, 13, 14, 16, 18, 20, 21, 22, 33, 34

In conformity with standards: EN 60947-1, EN 60947-5-1 and subsequent modifications and completions, fundamental requirements of the Low Voltage Directive 2006/95/CE and subsequent modifications and completions.

Please contact our technical service for the list of approved products.

## Data type approved by UL

Utilization categories Q300 (69 VA, 125-250 Vdc)  
A600 (720 VA, 120-600 Vac)

Data of the housing type 1, 4X "indoor use only"; 12, 13

For all contact blocks except 2 and 3 use 60 or 75 °C copper (Cu) conductor and wire size No. 12-14 AWG. Terminal tightening torque of 7,1 lb in (0,8 Nm).


For contact blocks 2 and 3 use 60 or 75 °C copper (Cu) conductor and wire size No. 14 AWG. Terminal tightening torque of 12 lb in (1,4 Nm).

In conformity with standard: UL 508

Please contact our technical service for the list of approved products.

## Adjustable levers

In switches with revolving lever it is possible to adjust the lever with 10° steps for the whole 360° range. The positive movement transmission is always guaranteed thanks to the particular geometrical coupling between the lever and the revolving shaft as prescribed for safety applications by the German standard BG-GS-ET-15.



## Overturning levers

It's possible to fasten the lever on switches on straight or reverse side, maintaining the positive coupling. In this way it is possible to obtain two different work plans of the lever.



## Rotating heads


In all switches, it is possible to rotate the head in 90° steps.




## Working operation of contact block 16 with independent contacts

The contact block 16 has two NC contacts, **both with positive opening** activated independently according to the lever turning direction.


Lever turned to left



Lever not turned







Lever turned to right



## Unidirectional heads

In the switches with revolving lever, it is possible to select the directional operation by removing the four screws of the head and revolving the internal piston (contact block 16 excluded).







## Contacts type:

- R** = snap action  
**L** = slow action  
**LO** = slow action overlapped  
**LS** = slow action shifted  
**LV** = slow action shifted and spaced  
**LI** = slow action independent  
**LA** = slow action closer  
 = electronic PNP

## Contact blocks

|                 |                                                                                   |                    |             |                    |             |                    |             |                    |             |
|-----------------|-----------------------------------------------------------------------------------|--------------------|-------------|--------------------|-------------|--------------------|-------------|--------------------|-------------|
| 5               | <b>R</b>                                                                          | FP 501             | ➔ 1NO+1NC   | FP 502             | ➔ 1NO+1NC   | FP 504             | 1NO+1NC     | FP 505             | ➔ 1NO+1NC   |
| 6               | <b>L</b>                                                                          | FP 601             | ➔ 1NO+1NC   | FP 602             | ➔ 1NO+1NC   | FP 604             | 1NO+1NC     | FP 605             | ➔ 1NO+1NC   |
| 7               | <b>LO</b>                                                                         | FP 701             | ➔ 1NO+1NC   | FP 702             | ➔ 1NO+1NC   | FP 704             | 1NO+1NC     | FP 705             | ➔ 1NO+1NC   |
| 9               | <b>L</b>                                                                          | FP 901             | ➔ 2NC       | FP 902             | ➔ 2NC       | FP 904             | 2NC         | FP 905             | ➔ 2NC       |
| 10              | <b>L</b>                                                                          | FP 1001            | 2NO         | FP 1002            | 2NO         | FP 1004            | 2NO         | FP 1005            | 2NO         |
| 11              | <b>R</b>                                                                          | FP 1101            | ➔ 2NC       | FP 1102            | ➔ 2NC       | FP 1104            | 2NC         | FP 1105            | ➔ 2NC       |
| 12              | <b>R</b>                                                                          | FP 1201            | 2NO         | FP 1202            | 2NO         | FP 1204            | 2NO         | FP 1205            | 2NO         |
| 13              | <b>LV</b>                                                                         | FP 1301            | ➔ 2NC       | FP 1302            | ➔ 2NC       | FP 1304            | 2NC         | FP 1305            | ➔ 2NC       |
| 14              | <b>LS</b>                                                                         | FP 1401            | ➔ 2NC       | FP 1402            | ➔ 2NC       | FP 1404            | 2NC         | FP 1405            | ➔ 2NC       |
| 15              | <b>LS</b>                                                                         | FP 1501            | 2NO         | FP 1502            | 2NO         | FP 1504            | 2NO         | FP 1505            | 2NO         |
| 18              | <b>LA</b>                                                                         | FP 1801            | ➔ 1NO+1NC   | FP 1802            | ➔ 1NO+1NC   | FP 1804            | 1NO+1NC     | FP 1805            | ➔ 1NO+1NC   |
| 20              | <b>L</b>                                                                          | FP 2001            | ➔ 1NO+2NC   | FP 2002            | ➔ 1NO+2NC   | FP 2004            | 1NO+2NC     | FP 2005            | ➔ 1NO+2NC   |
| 21              | <b>L</b>                                                                          | FP 2101            | ➔ 3NC       | FP 2102            | ➔ 3NC       | FP 2104            | 3NC         | FP 2105            | ➔ 3NC       |
| 22              | <b>L</b>                                                                          | FP 2201            | ➔ 2NO+1NC   | FP 2202            | ➔ 2NO+1NC   | FP 2204            | 2NO+1NC     | FP 2205            | ➔ 2NO+1NC   |
| 2               | <b>R</b>                                                                          | FP 201             | 2x(1NO-1NC) | FP 202             | 2x(1NO-1NC) | FP 204             | 2x(1NO-1NC) | FP 205             | 2x(1NO-1NC) |
| E1              |  | FP E101            | 1NO-1NC     | FP E102            | 1NO-1NC     | FP E104            | 1NO-1NC     | FP E105            | 1NO-1NC     |
| Max speed       |                                                                                   | page 6/3 - type 4  |             | page 6/3 - type 3  |             | 0,5 m/s            |             | page 6/3 - type 3  |             |
| Min. force      |                                                                                   | 8 N (25 N ➔)       |             | 6 N (25 N ➔)       |             | 0,17 Nm            |             | 6 N (25 N ➔)       |             |
| Travel diagrams |                                                                                   | page 6/4 - group 1 |             | page 6/4 - group 2 |             | page 6/4 - group 1 |             | page 6/4 - group 2 |             |

|                 |                                                                                    |                                                                                     |                    |                                                                                     |                    |                                                                                      |                                                                                       |
|-----------------|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|--------------------|-------------------------------------------------------------------------------------|--------------------|--------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|                 |                                                                                    |                                                                                     |                    | With external rubber gasket                                                         |                    |                                                                                      | With external rubber gasket                                                           |
|                 |                                                                                    |  |                    |  |                    |  |  |
| Contact blocks  |                                                                                    |                                                                                     |                    |                                                                                     |                    |                                                                                      |                                                                                       |
| 5               | <b>R</b>                                                                           | FP 508 ➔ 1NO+1NC                                                                    | FP 510 ➔ 1NO+1NC   | FP 511 ➔ 1NO+1NC                                                                    | FP 515 ➔ 1NO+1NC   |                                                                                      |                                                                                       |
| 6               | <b>L</b>                                                                           | FP 608 ➔ 1NO+1NC                                                                    | FP 610 ➔ 1NO+1NC   | FP 611 ➔ 1NO+1NC                                                                    | FP 615 ➔ 1NO+1NC   |                                                                                      |                                                                                       |
| 7               | <b>LO</b>                                                                          | FP 708 ➔ 1NO+1NC                                                                    | FP 710 ➔ 1NO+1NC   | FP 711 ➔ 1NO+1NC                                                                    | FP 715 ➔ 1NO+1NC   |                                                                                      |                                                                                       |
| 9               | <b>L</b>                                                                           | FP 908 ➔ 2NC                                                                        | FP 910 ➔ 2NC       | FP 911 ➔ 2NC                                                                        | FP 915 ➔ 2NC       |                                                                                      |                                                                                       |
| 10              | <b>L</b>                                                                           | FP 1008 2NO                                                                         | FP 1010 2NO        | FP 1011 2NO                                                                         | FP 1015 2NO        |                                                                                      |                                                                                       |
| 11              | <b>R</b>                                                                           | FP 1108 ➔ 2NC                                                                       | FP 1110 ➔ 2NC      | FP 1111 ➔ 2NC                                                                       | FP 1115 ➔ 2NC      |                                                                                      |                                                                                       |
| 12              | <b>R</b>                                                                           | FP 1208 2NO                                                                         | FP 1210 2NO        | FP 1211 2NO                                                                         | FP 1215 2NO        |                                                                                      |                                                                                       |
| 13              | <b>LV</b>                                                                          | FP 1308 ➔ 2NC                                                                       | FP 1310 ➔ 2NC      | FP 1311 ➔ 2NC                                                                       | FP 1315 ➔ 2NC      |                                                                                      |                                                                                       |
| 14              | <b>LS</b>                                                                          | FP 1408 ➔ 2NC                                                                       | FP 1410 ➔ 2NC      | FP 1411 ➔ 2NC                                                                       | FP 1415 ➔ 2NC      |                                                                                      |                                                                                       |
| 15              | <b>LS</b>                                                                          | FP 1508 2NO                                                                         | FP 1510 2NO        | FP 1511 2NO                                                                         | FP 1515 2NO        |                                                                                      |                                                                                       |
| 18              | <b>LA</b>                                                                          | FP 1808 ➔ 1NO+1NC                                                                   | FP 1810 ➔ 1NO+1NC  | FP 1811 ➔ 1NO+1NC                                                                   | FP 1815 ➔ 1NO+1NC  |                                                                                      |                                                                                       |
| 20              | <b>L</b>                                                                           | FP 2008 ➔ 1NO+2NC                                                                   | FP 2010 ➔ 1NO+2NC  | FP 2011 ➔ 1NO+2NC                                                                   | FP 2015 ➔ 1NO+2NC  |                                                                                      |                                                                                       |
| 21              | <b>L</b>                                                                           | FP 2108 ➔ 3NC                                                                       | FP 2110 ➔ 3NC      | FP 2111 ➔ 3NC                                                                       | FP 2115 ➔ 3NC      |                                                                                      |                                                                                       |
| 22              | <b>L</b>                                                                           | FP 2208 ➔ 2NO+1NC                                                                   | FP 2210 ➔ 2NO+1NC  | FP 2211 ➔ 2NO+1NC                                                                   | FP 2215 ➔ 2NO+1NC  |                                                                                      |                                                                                       |
| 2               | <b>R</b>                                                                           | FP 208 2x(1NO-1NC)                                                                  | FP 210 2x(1NO-1NC) | FP 211 2x(1NO-1NC)                                                                  | FP 215 2x(1NO-1NC) |                                                                                      |                                                                                       |
| E1              |  | FP E108 1NO-1NC                                                                     | FP E110 1NO-1NC    | FP E111 1NO-1NC                                                                     | FP E115 1NO-1NC    |                                                                                      |                                                                                       |
| Max speed       |                                                                                    | page 6/3 - type 4                                                                   | page 6/3 - type 4  | page 6/3 - type 4                                                                   | page 6/3 - type 2  |                                                                                      |                                                                                       |
| Min. force      |                                                                                    | 8 N (25 N ➔)                                                                        | 11 N (25 N ➔)      | 8 N (25 N ➔)                                                                        | 11 N (25 N ➔)      |                                                                                      |                                                                                       |
| Travel diagrams |                                                                                    | page 6/4 - group 1                                                                  | page 6/4 - group 1 | page 6/4 - group 1                                                                  | page 6/4 - group 1 |                                                                                      |                                                                                       |












Contacts type:

- R** = snap action
- L** = slow action
- LO** = slow action overlapped
- LS** = slow action shifted
- LV** = slow action shifted and spaced
- LI** = slow action independent
- LA** = slow action closer
- A** = electronic PNP

Contact blocks

|                 |           | Ø 8 mm stainless steel sphere                                                     | Ø 12,7 mm stainless steel sphere                                                  | With external rubber gasket                                                         |
|-----------------|-----------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|                 |           |  |  |  |
| 5               | <b>R</b>  | FP 516 → 1NO+1NC                                                                  | FP 518 → 1NO+1NC                                                                  | FP 519 → 1NO+1NC                                                                    |
| 6               | <b>L</b>  | FP 616 → 1NO+1NC                                                                  | FP 618 → 1NO+1NC                                                                  | FP 619 → 1NO+1NC                                                                    |
| 7               | <b>LO</b> | FP 716 → 1NO+1NC                                                                  | FP 718 → 1NO+1NC                                                                  | FP 719 → 1NO+1NC                                                                    |
| 9               | <b>L</b>  | FP 916 → 2NC                                                                      | FP 918 → 2NC                                                                      | FP 919 → 2NC                                                                        |
| 10              | <b>L</b>  | FP 1016 2NO                                                                       | FP 1018 2NO                                                                       | FP 1019 2NO                                                                         |
| 11              | <b>R</b>  | FP 1116 → 2NC                                                                     | FP 1118 → 2NC                                                                     | FP 1119 → 2NC                                                                       |
| 12              | <b>R</b>  | FP 1216 2NO                                                                       | FP 1218 2NO                                                                       | FP 1219 2NO                                                                         |
| 13              | <b>LV</b> | FP 1316 → 2NC                                                                     | FP 1318 → 2NC                                                                     | FP 1319 → 2NC                                                                       |
| 14              | <b>LS</b> | FP 1416 → 2NC                                                                     | FP 1418 → 2NC                                                                     | FP 1419 → 2NC                                                                       |
| 15              | <b>LS</b> | FP 1516 2NO                                                                       | FP 1518 2NO                                                                       | FP 1519 2NO                                                                         |
| 18              | <b>LA</b> | FP 1816 → 1NO+1NC                                                                 | FP 1818 → 1NO+1NC                                                                 | FP 1819 → 1NO+1NC                                                                   |
| 20              | <b>L</b>  | FP 2016 → 1NO+2NC                                                                 | FP 2018 → 1NO+2NC                                                                 | FP 2019 → 1NO+2NC                                                                   |
| 21              | <b>L</b>  | FP 2116 → 3NC                                                                     | FP 2118 → 3NC                                                                     | FP 2119 → 3NC                                                                       |
| 22              | <b>L</b>  | FP 2216 → 2NO+1NC                                                                 | FP 2218 → 2NO+1NC                                                                 | FP 2219 → 2NO+1NC                                                                   |
| 2               | <b>R</b>  | FP 216 2x(1NO-1NC)                                                                | FP 218 2x(1NO-1NC)                                                                | FP 219 2x(1NO-1NC)                                                                  |
| E1              | <b>A</b>  | FP E116 1NO-1NC                                                                   | FP E118 1NO-1NC                                                                   | FP E119 1NO-1NC                                                                     |
| Max speed       |           | page 6/3 - type 2                                                                 | page 6/3 - type 4                                                                 | page 6/3 - type 4                                                                   |
| Min. force      |           | 8 N (25 N →)                                                                      | 8 N (25 N →)                                                                      | 8 N (25 N →)                                                                        |
| Travel diagrams |           | page 6/4 - group 1                                                                | page 6/4 - group 1                                                                | page 6/4 - group 1                                                                  |

|                 |           | With external rubber gasket                                                         | With external rubber gasket                                                         | Other rollers available. See page 2/22                                               | Ø 3 mm stainless steel round rod                                                      |
|-----------------|-----------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|                 |           |  |  |  |  |
| 5               | <b>R</b>  | FP 521 1NO+1NC                                                                      | FP 525 1NO+1NC                                                                      | FP 531 → 1NO+1NC                                                                     | FP 532 1NO+1NC                                                                        |
| 6               | <b>L</b>  |                                                                                     |                                                                                     | FP 631 → 1NO+1NC                                                                     | FP 632 1NO+1NC                                                                        |
| 7               | <b>LO</b> |                                                                                     |                                                                                     | FP 731 → 1NO+1NC                                                                     | FP 732 1NO+1NC                                                                        |
| 9               | <b>L</b>  |                                                                                     |                                                                                     | FP 931 → 2NC                                                                         | FP 932 2NC                                                                            |
| 10              | <b>L</b>  | FP 1021 2NO                                                                         | FP 1025 2NO                                                                         | FP 1031 2NO                                                                          | FP 1032 2NO                                                                           |
| 11              | <b>R</b>  |                                                                                     |                                                                                     | FP 1131 → 2NC                                                                        | FP 1132 2NC                                                                           |
| 12              | <b>R</b>  |                                                                                     |                                                                                     | FP 1231 2NO                                                                          | FP 1232 2NO                                                                           |
| 13              | <b>LV</b> |                                                                                     |                                                                                     | FP 1331 → 2NC                                                                        | FP 1332 2NC                                                                           |
| 14              | <b>LS</b> |                                                                                     |                                                                                     | FP 1431 → 2NC                                                                        | FP 1432 2NC                                                                           |
| 15              | <b>LS</b> |                                                                                     |                                                                                     | FP 1531 2NO                                                                          | FP 1532 2NO                                                                           |
| 16              | <b>LI</b> |                                                                                     |                                                                                     | FP 1631 → 2NC                                                                        | FP 1632 2NC                                                                           |
| 18              | <b>LA</b> | FP 1821 1NO+1NC                                                                     | FP 1825 1NO+1NC                                                                     | FP 1831 → 1NO+1NC                                                                    | FP 1832 1NO+1NC                                                                       |
| 20              | <b>L</b>  | FP 2021 1NO+2NC                                                                     | FP 2025 1NO+2NC                                                                     | FP 2031 → 1NO+2NC                                                                    | FP 2032 1NO+2NC                                                                       |
| 21              | <b>L</b>  | FP 2121 3NC                                                                         | FP 2125 3NC                                                                         | FP 2131 → 3NC                                                                        | FP 2132 3NC                                                                           |
| 22              | <b>L</b>  | FP 2221 2NO+1NC                                                                     | FP 2225 2NO+1NC                                                                     | FP 2231 → 2NO+1NC                                                                    | FP 2232 2NO+1NC                                                                       |
| 2               | <b>R</b>  | FP 221 2x(1NO-1NC)                                                                  | FP 225 2x(1NO-1NC)                                                                  | FP 231 2x(1NO-1NC)                                                                   | FP 232 2x(1NO-1NC)                                                                    |
| E1              | <b>A</b>  | FP E121 1NO-1NC                                                                     | FP E125 1NO-1NC                                                                     | FP E131 1NO-1NC                                                                      | FP E132 1NO-1NC                                                                       |
| Max speed       |           | 1 m/s                                                                               | 1 m/s                                                                               | page 6/3 - type 1                                                                    | 1,5 m/s                                                                               |
| Min. force      |           | 0,08 Nm                                                                             | 0,14 Nm                                                                             | 0,1 Nm (0,25 Nm →)                                                                   | 0,1 Nm                                                                                |
| Travel diagrams |           | page 6/4 - group 3                                                                  | page 6/4 - group 3                                                                  | page 6/4 - group 4                                                                   | page 6/4 - group 4                                                                    |

Items with code on the green background are available in stock



## Contacts type:

- R** = snap action  
**L** = slow action  
**LO** = slow action overlapped  
**LS** = slow action shifted  
**LV** = slow action shifted and spaced  
**LI** = slow action independent  
**LA** = slow action closer  
 = electronic PNP

## Contact blocks

|                 |                                                                                   |                    |             |                    |             |                    |                          |                    |             |
|-----------------|-----------------------------------------------------------------------------------|--------------------|-------------|--------------------|-------------|--------------------|--------------------------|--------------------|-------------|
| 5               | <b>R</b>                                                                          | FP 533             | 1NO+1NC     | FP 534             | 1NO+1NC     | FP 535             | ➔ <sup>(1)</sup> 1NO+1NC | FP 536             | 1NO+1NC     |
| 6               | <b>L</b>                                                                          | FP 633             | 1NO+1NC     | FP 634             | 1NO+1NC     | FP 635             | ➔ <sup>(1)</sup> 1NO+1NC | FP 636             | 1NO+1NC     |
| 7               | <b>LO</b>                                                                         | FP 733             | 1NO+1NC     | FP 734             | 1NO+1NC     | FP 735             | ➔ <sup>(1)</sup> 1NO+1NC | FP 736             | 1NO+1NC     |
| 9               | <b>L</b>                                                                          | FP 933             | 2NC         | FP 934             | 2NC         | FP 935             | ➔ <sup>(1)</sup> 2NC     | FP 936             | 2NC         |
| 10              | <b>L</b>                                                                          | FP 1033            | 2NO         | FP 1034            | 2NO         | FP 1035            | 2NO                      | FP 1036            | 2NO         |
| 11              | <b>R</b>                                                                          | FP 1133            | 2NC         | FP 1134            | 2NC         | FP 1135            | ➔ <sup>(1)</sup> 2NC     | FP 1136            | 2NC         |
| 12              | <b>R</b>                                                                          | FP 1233            | 2NO         | FP 1234            | 2NO         | FP 1235            | 2NO                      | FP 1236            | 2NO         |
| 13              | <b>LV</b>                                                                         | FP 1333            | 2NC         | FP 1334            | 2NC         | FP 1335            | ➔ <sup>(1)</sup> 2NC     | FP 1336            | 2NC         |
| 14              | <b>LS</b>                                                                         | FP 1433            | 2NC         | FP 1434            | 2NC         | FP 1435            | ➔ <sup>(1)</sup> 2NC     | FP 1436            | 2NC         |
| 15              | <b>LS</b>                                                                         | FP 1533            | 2NO         | FP 1534            | 2NO         | FP 1535            | 2NO                      | FP 1536            | 2NO         |
| 16              | <b>LI</b>                                                                         | FP 1633            | 2NC         | FP 1634            | 2NC         | FP 1635            | ➔ <sup>(1)</sup> 2NC     | FP 1636            | 2NC         |
| 18              | <b>LA</b>                                                                         | FP 1833            | 1NO+1NC     | FP 1834            | 1NO+1NC     | FP 1835            | ➔ <sup>(1)</sup> 1NO+1NC | FP 1836            | 1NO+1NC     |
| 20              | <b>L</b>                                                                          | FP 2033            | 1NO+2NC     | FP 2034            | 1NO+2NC     | FP 2035            | ➔ <sup>(1)</sup> 1NO+2NC | FP 2036            | 1NO+2NC     |
| 21              | <b>L</b>                                                                          | FP 2133            | 3NC         | FP 2134            | 3NC         | FP 2135            | ➔ <sup>(1)</sup> 3NC     | FP 2136            | 3NC         |
| 22              | <b>L</b>                                                                          | FP 2233            | 2NO+1NC     | FP 2234            | 2NO+1NC     | FP 2235            | ➔ <sup>(1)</sup> 2NO+1NC | FP 2236            | 2NO+1NC     |
| 2               | <b>R</b>                                                                          | FP 233             | 2x(1NO-1NC) | FP 234             | 2x(1NO-1NC) | FP 235             | 2x(1NO-1NC)              | FP 236             | 2x(1NO-1NC) |
| E1              |  | FP E133            | 1NO-1NC     | FP E134            | 1NO-1NC     | FP E135            | 1NO-1NC                  | FP E136            | 1NO-1NC     |
| Max speed       |                                                                                   | 1,5 m/s            |             | 1 m/s              |             | page 6/3 - type 1  |                          | 1,5 m/s            |             |
| Min. force      |                                                                                   | 0,1 Nm             |             | 0,1 Nm             |             | 0,1 Nm (0,25 Nm ➔) |                          | 0,1 Nm             |             |
| Travel diagrams |                                                                                   | page 6/4 - group 4 |             | page 6/4 - group 4 |             | page 6/4 - group 4 |                          | page 6/4 - group 4 |             |

## Contact blocks

|                 |                                                                                    |                     |             |                     |             |                     |             |                    |             |
|-----------------|------------------------------------------------------------------------------------|---------------------|-------------|---------------------|-------------|---------------------|-------------|--------------------|-------------|
| 5               | <b>R</b>                                                                           | FP 551              | ➔ 1NO+1NC   | FP 552              | ➔ 1NO+1NC   | FP 553-E11V9        | ➔ 1NO+1NC   | FP 556             | ➔ 1NO+1NC   |
| 6               | <b>L</b>                                                                           | FP 651              | ➔ 1NO+1NC   | FP 652              | ➔ 1NO+1NC   | FP 653-E11V9        | ➔ 1NO+1NC   | FP 656             | ➔ 1NO+1NC   |
| 7               | <b>LO</b>                                                                          | FP 751              | ➔ 1NO+1NC   | FP 752              | ➔ 1NO+1NC   | FP 753-E11V9        | ➔ 1NO+1NC   | FP 756             | ➔ 1NO+1NC   |
| 9               | <b>L</b>                                                                           | FP 951              | ➔ 2NC       | FP 952              | ➔ 2NC       | FP 953-E11V9        | ➔ 2NC       | FP 956             | ➔ 2NC       |
| 10              | <b>L</b>                                                                           | FP 1051             | 2NO         | FP 1052             | 2NO         | FP 1053-E11V9       | 2NO         | FP 1056            | 2NO         |
| 11              | <b>R</b>                                                                           | FP 1151             | ➔ 2NC       | FP 1152             | ➔ 2NC       | FP 1253-E11V9       | 2NO         | FP 1156            | ➔ 2NC       |
| 12              | <b>R</b>                                                                           | FP 1251             | 2NO         | FP 1252             | 2NO         | FP 1353-E11V9       | ➔ 2NC       | FP 1256            | 2NO         |
| 13              | <b>LV</b>                                                                          | FP 1351             | ➔ 2NC       | FP 1352             | ➔ 2NC       | FP 1453-E11V9       | ➔ 2NC       | FP 1356            | ➔ 2NC       |
| 14              | <b>LS</b>                                                                          | FP 1451             | ➔ 2NC       | FP 1452             | ➔ 2NC       | FP 1553-E11V9       | 2NO         | FP 1456            | ➔ 2NC       |
| 15              | <b>LS</b>                                                                          | FP 1551             | 2NO         | FP 1552             | 2NO         |                     |             | FP 1556            | 2NO         |
| 16              | <b>LI</b>                                                                          |                     |             |                     |             |                     |             | FP 1656            | ➔ 2NC       |
| 18              | <b>LA</b>                                                                          | FP 1851             | ➔ 1NO+1NC   | FP 1852             | ➔ 1NO+1NC   | FP 1853-E11V9       | ➔ 1NO+1NC   | FP 1856            | ➔ 1NO+1NC   |
| 20              | <b>L</b>                                                                           | FP 2051             | ➔ 1NO+2NC   | FP 2052             | ➔ 1NO+2NC   | FP 2053-E11V9       | ➔ 1NO+2NC   | FP 2056            | ➔ 1NO+2NC   |
| 21              | <b>L</b>                                                                           | FP 2151             | ➔ 3NC       | FP 2152             | ➔ 3NC       | FP 2153-E11V9       | ➔ 3NC       | FP 2156            | ➔ 3NC       |
| 22              | <b>L</b>                                                                           | FP 2251             | ➔ 2NO+1NC   | FP 2252             | ➔ 2NO+1NC   | FP 2253-E11V9       | ➔ 2NO+1NC   | FP 2256            | ➔ 2NO+1NC   |
| 2               | <b>R</b>                                                                           | FP 251              | 2x(1NO-1NC) | FP 252              | 2x(1NO-1NC) | FP 253-E11          | 2x(1NO-1NC) | FP 256             | 2x(1NO-1NC) |
| E1              |  | FP E151             | 1NO-1NC     | FP E152             | 1NO-1NC     | FP E153-E11V9       | 1NO-1NC     | FP E156            | 1NO-1NC     |
| Max speed       |                                                                                    | page 6/3 - type 1   |             | page 6/3 - type 1   |             | 0,5 m/s             |             | page 6/3 - type 1  |             |
| Min. force      |                                                                                    | 0,06 Nm (0,25 Nm ➔) |             | 0,06 Nm (0,25 Nm ➔) |             | 0,0. Nm (0,25 Nm ➔) |             | 0,1 Nm (0,25 Nm ➔) |             |
| Travel diagrams |                                                                                    | page 6/4 - group 4  |             | page 6/4 - group 4  |             | page 6/4 - group 5  |             | page 6/4 - group 4 |             |

## Accessories See page 5/1

<sup>(1)</sup> Positive opening only with lever adjusted on the max. See page 2/21.



Contacts type:

- R** = snap action
- L** = slow action
- LO** = slow action overlapped
- LS** = slow action shifted
- LV** = slow action shifted and spaced
- LI** = slow action independent
- LA** = slow action closer
- = electronic PNP

Contact blocks

|                 | Other rollers available. See page 2/12 | With stainless steel rollers on request      | With stainless steel rollers on request      | Rope switches for signalling |
|-----------------|----------------------------------------|----------------------------------------------|----------------------------------------------|------------------------------|
|                 |                                        |                                              |                                              |                              |
| 5               | <b>R</b> FP 557 → 1NO+1NC              | FP 541 → 1NO+1NC                             | FP 542 → 1NO+1NC                             | FP 576 1NO+1NC               |
| 6               | <b>L</b> FP 657 → 1NO+1NC              | Bistable switch with single track lyra lever | Bistable switch with double track lyra lever | FP 676 1NO+1NC               |
| 7               | <b>LO</b> FP 757 → 1NO+1NC             |                                              |                                              | FP 776 1NO+1NC               |
| 9               | <b>L</b> FP 957 → 2NC                  |                                              |                                              | FP 976 2NO                   |
| 10              | <b>L</b> FP 1057 2NO                   |                                              |                                              | FP 1076 2NC                  |
| 11              | <b>R</b> FP 1157 → 2NC                 |                                              |                                              | FP 1176 2NO                  |
| 12              | <b>R</b> FP 1257 2NO                   |                                              |                                              | FP 1276 2NC                  |
| 13              | <b>LV</b> FP 1357 → 2NC                |                                              |                                              | FP 1376 2NO                  |
| 14              | <b>LS</b> FP 1457 → 2NC                |                                              |                                              | FP 1476 2NO                  |
| 15              | <b>LS</b> FP 1557 2NO                  |                                              |                                              | FP 1576 2NC                  |
| 16              | <b>LI</b> FP 1657 → 2NC                |                                              |                                              |                              |
| 18              | <b>LA</b> FP 1857 → 1NO+1NC            |                                              |                                              | FP 1876 1NO+1NC              |
| 20              | <b>L</b> FP 2057 → 1NO+2NC             |                                              |                                              | FP 2076 2NO+1NC              |
| 21              | <b>L</b> FP 2157 → 3NC                 |                                              |                                              | FP 2176 3NO                  |
| 22              | <b>L</b> FP 2257 → 2NO+1NC             |                                              |                                              | FP 2276 1NO+2NC              |
| 2               | <b>R</b> FP 257 2x(1NO-1NC)            |                                              |                                              | FP 276 2x(1NO-1NC)           |
| E1              | FP E157 1NO-1NC                        |                                              |                                              |                              |
| Max speed       | page 6/3 - type 1                      | 0,5 m/s with 30° cam                         | 0,5 m/s with 30° cam                         | 0,5 m/s                      |
| Min. force      | 0,1 Nm (0,25 Nm →)                     | 0,21 Nm                                      | 0,21 Nm                                      | initial 20 N - final 40 N    |
| Travel diagrams | page 6/4 - group 4                     |                                              |                                              | page 6/4 - group 6           |

|                 |           |  |  |  |
|-----------------|-----------|--|--|--|
| 5               | <b>R</b>  |  |  |  |
| 6               | <b>L</b>  |  |  |  |
| 7               | <b>LO</b> |  |  |  |
| 9               | <b>L</b>  |  |  |  |
| 10              | <b>L</b>  |  |  |  |
| 11              | <b>R</b>  |  |  |  |
| 12              | <b>R</b>  |  |  |  |
| 13              | <b>LV</b> |  |  |  |
| 14              | <b>LS</b> |  |  |  |
| 15              | <b>LS</b> |  |  |  |
| 16              | <b>LI</b> |  |  |  |
| 18              | <b>LA</b> |  |  |  |
| 20              | <b>L</b>  |  |  |  |
| 21              | <b>L</b>  |  |  |  |
| 22              | <b>L</b>  |  |  |  |
| 2               | <b>R</b>  |  |  |  |
| E1              |           |  |  |  |
| Max speed       |           |  |  |  |
| Min. force      |           |  |  |  |
| Travel diagrams |           |  |  |  |

Items with code on the **green** background are available in stock




## Position switches with revolving lever without actuator

Contacts type:



- R** = snap action  
**L** = slow action  
**LO** = slow action overlapped  
**LS** = slow action shifted  
**LV** = slow action shifted and spaced  
**LI** = slow action independent  
**LA** = slow action closer  
 = electronic PNP

Contact blocks

Regular head




Compact head



## IMPORTANT

**For safety applications:** join only switches and actuators marked with symbol .














For more information about safety applications see page 6/1.

|                 |                                                                                 |                                                                                                      |             |                                                                                                       |             |                                                                                                                                                                                |         |
|-----------------|---------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------|-------------|-------------------------------------------------------------------------------------------------------|-------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------|
| 5               | <b>R</b>                                                                        | <b>FP 538</b>       | 1NO+1NC     | <b>FP 558</b>        | 1NO+1NC     | <b>FD 540</b>                                                                                 | 1NO+1NC |
| 6               | <b>L</b>                                                                        | <b>FP 638</b>       | 1NO+1NC     | <b>FP 658</b>        | 1NO+1NC     | Bistable switch<br><br>S = mechanical snap point<br>positive opening with 21-22 contact only |         |
| 7               | <b>LO</b>                                                                       | <b>FP 738</b>       | 1NO+1NC     | <b>FP 758</b>        | 1NO+1NC     |                                                                                                                                                                                |         |
| 9               | <b>L</b>                                                                        | <b>FP 938</b>       | 2NC         | <b>FP 958</b>        | 2NC         |                                                                                                                                                                                |         |
| 10              | <b>L</b>                                                                        | <b>FP 1038</b>                                                                                       | 2NO         | <b>FP 1058</b>                                                                                        | 2NO         |                                                                                                                                                                                |         |
| 11              | <b>R</b>                                                                        | <b>FP 1138</b>      | 2NC         | <b>FP 1158</b>       | 2NC         |                                                                                                                                                                                |         |
| 12              | <b>R</b>                                                                        | <b>FP 1238</b>                                                                                       | 2NO         | <b>FP 1258</b>                                                                                        | 2NO         |                                                                                                                                                                                |         |
| 13              | <b>LV</b>                                                                       | <b>FP 1338</b>      | 2NC         | <b>FP 1358</b>       | 2NC         |                                                                                                                                                                                |         |
| 14              | <b>LS</b>                                                                       | <b>FP 1438</b>      | 2NC         | <b>FP 1458</b>       | 2NC         |                                                                                                                                                                                |         |
| 15              | <b>LS</b>                                                                       | <b>FP 1538</b>                                                                                       | 2NO         | <b>FP 1558</b>                                                                                        | 2NO         |                                                                                                                                                                                |         |
| 16              | <b>LI</b>                                                                       | <b>FP 1638</b>      | 2NC         |                                                                                                       |             |                                                                                                                                                                                |         |
| 18              | <b>LA</b>                                                                       | <b>FP 1838</b>      | 1NO+1NC     | <b>FP 1858</b>       | 1NO+1NC     |                                                                                                                                                                                |         |
| 20              | <b>L</b>                                                                        | <b>FP 2038</b>      | 1NO+2NC     | <b>FP 2058</b>       | 1NO+2NC     |                                                                                                                                                                                |         |
| 21              | <b>L</b>                                                                        | <b>FP 2138</b>      | 3NC         | <b>FP 2158</b>       | 3NC         |                                                                                                                                                                                |         |
| 22              | <b>L</b>                                                                        | <b>FP 2238</b>      | 2NO+1NC     | <b>FP 2258</b>       | 2NO+1NC     |                                                                                                                                                                                |         |
| 2               | <b>R</b>                                                                        | <b>FP 238</b>                                                                                        | 2x(1NO-1NC) | <b>FP 258</b>                                                                                         | 2x(1NO-1NC) |                                                                                                                                                                                |         |
| E1              |  | <b>FP E138</b>                                                                                       | 1NO+1NC     | <b>FP E158</b>                                                                                        | 1NO+1NC     |                                                                                                                                                                                |         |
| Min. force      |                                                                                 | 0,1 Nm (0,25 Nm  ) |             | 0,06 Nm (0,25 Nm  ) |             | 0,5 m/s with 30° cam                                                                                                                                                           |         |
| Travel diagrams |                                                                                 | page 6/4 - group 4                                                                                   |             | page 6/4 - group 4                                                                                    |             | 0,21 Nm                                                                                                                                                                        |         |

## Loose actuators

10 pcs pack

IMPORTANT: These loose actuators can be used with items of series FD, FP, FL, FC only

| Polymer roller<br>Ø 20 mm                                                                  | Adjustable round rod<br>Ø 3x125 mm                                                         | Adjustable square rod<br>3x3x125 mm                                                        | Flexible rod actuator                                                                      | Adjustable actuator with<br>polymer roller                                                           | Adjustable fiber glass rod                                                                       |                                                                                              |
|--------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------|
|         |         |         |         |                 |             |                                                                                              |
| VF L31  | VF L32  | VF L33  | VF L34                                                                                     | VF L35  (1) (3) | VF L36      |                                                                                              |
| Single track<br>lyra actuator                                                              | Double tracks<br>lyra actuator                                                             | Polymer roller<br>Ø 20 mm                                                                  | Polymer roller<br>Ø 20 mm                                                                  | Porcelain roller                                                                                     | Adjustable safety actua-<br>tor with polymer roller                                              | Polymer roller<br>Ø 20 mm                                                                    |
|          |         |         |         |                  |             |         |
| VF L41  | VF L42  | VF L51  | VF L52  | VF L53  (2)     | VF L56  (3) | VF L57  |

- Only orders for multiple quantities of the packs are accepted.

(1) Actuator VF L35 suits to safety applications only if adjusted to its max length, as you can see in figure beside. If you need an adjustable lever for safety applications, use the adjustable safety lever VF L56.

(2) The position switch obtained by assembling the switch FP •58 (e.g. FP 558, FP 658) with the actuator VF L53 will not present the same travel diagrams and actuating forces as the position switch FP •53-E11V9 (e.g. FP 553-E11V9, FP 653-E11V9...).

(3) If it is installed with switch FP •58 (e.g. FP 558, FP 658...), the actuator can mechanically interfere with the housing of the switch. The interference could happen or not according to the actuator and the head fixing position.

(4) The actuator cannot be oriented to inside direction because it will mechanically interfere with the switch head.

Accessories See page 5/1

Items with code on the **green** background are available in stock



## Special loose actuators

10 pcs pack

**IMPORTANT:** These loose actuators can be used with items of series FD, FP, FL, FC only

Ø 20 mm stainless steel rollers

|              |                  |              |              |              |              |
|--------------|------------------|--------------|--------------|--------------|--------------|
|              |                  |              |              |              |              |
| VF L31-1 (1) | VF L35-1 (1) (3) | VF L51-1 (1) | VF L52-1 (1) | VF L56-1 (3) | VF L57-1 (1) |

Ø 35 mm polymer rollers

|              |                  |              |              |              |              |
|--------------|------------------|--------------|--------------|--------------|--------------|
|              |                  |              |              |              |              |
| VF L31-2 (4) | VF L35-2 (1) (3) | VF L51-2 (4) | VF L52-2 (1) | VF L56-2 (3) | VF L57-2 (1) |

Ø 40 mm rubber rollers

|               |                   |               |               |               |               |
|---------------|-------------------|---------------|---------------|---------------|---------------|
|               |                   |               |               |               |               |
| VF L31-R5 (4) | VF L35-R5 (1) (3) | VF L51-R5 (4) | VF L52-R5 (1) | VF L56-R5 (3) | VF L57-R5 (4) |

Ø 50 mm rubber rollers

|              |                  |              |              |              |              |
|--------------|------------------|--------------|--------------|--------------|--------------|
|              |                  |              |              |              |              |
| VF L31-3 (4) | VF L35-3 (1) (3) | VF L51-3 (4) | VF L52-3 (4) | VF L56-3 (3) | VF L57-3 (4) |

Ø 50 mm overhanging rubber rollers

|                  |              |
|------------------|--------------|
|                  |              |
| VF L35-4 (1) (3) | VF L56-4 (3) |