

CAM SWITCHES - CUSTOM REQUEST FORM

▶ APPLICATION

- Load switching
 - resistive inductive

Rated voltage AC/DC

Rated current A

- Control of motors
 - Starting/Switching off a running motor
 - Reverse direction of rotation
- Motor rating A/CV/kW/HP

▶ DIAGRAM

(Fill in the grid below using the appropriate symbols)

- Closed contact
- Closed contact, 2 positions without cut-off
- Overlapping: second contact closes before first contact opens (not possible with 30° switching angle)
- Impulse contact, closes momentarily when switching from one position to next
- Spring return

Contact Nos.	Position No.												Terminals connection + links
	1	2	3	4	5	6	7	8	9	10	11	12	
1-2													○ 1 3 ○
3-4													○ 2 4 ○
5-6													○ 5 7 ○
7-8													○ 6 8 ○
9-10													○ 9 11 ○
11-12													○ 10 12 ○
13-14													○ 13 15 ○
15-16													○ 14 16 ○
17-18													○ 17 19 ○
19-20													○ 18 20 ○
21-22													○ 21 23 ○
23-24													○ 22 24 ○
25-26													○ 25 27 ○
27-28													○ 26 28 ○
29-30													○ 29 31 ○
31-32													○ 30 32 ○
33-34													○ 33 35 ○
35-36													○ 34 36 ○
37-38													○ 37 39 ○
39-40													○ 38 40 ○
41-42													○ 41 43 ○
43-44													○ 42 44 ○
45-46													○ 45 47 ○
47-48													○ 46 48 ○

▶ MOUNTING

- Front One-hole
- Rear DIN rail
- Enclosure

▶ STANDARD PRESENTATION

- Handle: small medium large
- Lever: small large
- Color: grey black red
- Selector switch style handle
- With key
 - Choice of key: 455 1424 A other.....


▶ LEGEND PLATE AND ENGRAVING

- Choice of legend plate:
- 48 64 72 96
 - Alu Black Red Yellow

▶ SWITCHING ANGLE

- Engraving: (use opposite box to specify your engravings)
 - linear
 - polygonal
- Duty label (2 x 13 characters) :
.....
.....

▶ MARKING OF POSITIONS

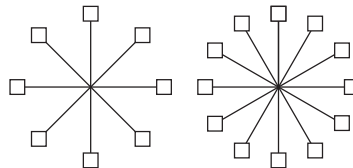

▶ SWITCHING ANGLE

- 90° 60° 45° 30°
- (indicate positions in boxes)
- Blocking-off between and position
- One-way rotation: right left

YOUR DETAILS

Company:

.....

Name and surname:

.....

Address:

.....

E-mail :

Tel:

Fax:

COMMENTS

YOUR ENGRAVINGS

.....

.....

▶ PADLOCKABLE PRESENTATION

- Color: yellow/red grey
- Size: 48 72 96

▶ OPTIONS

- Foolproof handle
- IP rating: IP 40 (standard) IP 55 IP 65
- Terminal covers
- Tropicalized version