



## Type ECX - Special Purpose Contactor

### 3 & 4 Pole Contactors



Three Pole	Part #	ECX 18- *	ECX 32- *	ECX 65- *	ECX 95- *
Three Pole	List Price	\$ 28.00	\$ 42.00	\$ 80.00	\$ 126.00
Built in Auxiliaries		1N.O.	1N.O.	1N.O + 1 N.C..	1N.O + 1 N.C..
Resistive Amps AC-1 , 660V		32A	50A	80A	110A
240 Volts Motor Full Load Amps		22A	42A	68A	80A
3 Phase Horse Power Voltage:		HP	HP	HP	HP
200V		7 1/2	10	20	30
240V		7 1/2	15	25	30
460V		10	20	40	50
600V		10	20	40	50
IEC AC-3 380V Amps		18	32	65	95
IEC AC-3 660V Amps		12	21	42	49
<b>Single Phase UL ratings</b>					
115V 1 Phase HP		1	3	5	7 1/2
230V 1 Phase HP		3	5	15	20
<b>Dimensions - 3 Pole</b>		<b>ECX 18</b>	<b>ECX 32</b>	<b>ECX 65</b>	<b>ECX 95</b>
Height	Inches	3"	3.4"	5.08"	5.08"
Width	Inches	1.85"	2.24"	3"	3.43"
Depth	Inches	3.43"	3.94"	4.6"	5"
Depth with Extra Snap On Auxiliary	Inches	4.75"	6.08"	6.08"	6.50"
AC Coil Power	3 + 4 Pole	<b>ECX 18</b>	<b>ECX 32</b>	<b>ECX 65</b>	<b>ECX 95</b>
Holding VA		8	11	20	20
Pick Up VA		70	110	200	200

Four Pole Part #	ECX254N.O.-	Dimensions
List Price	\$ 40.00	H = 86mm
40 Amp Resistive,  : FLA28 @ 240V		W = 57mm
200V-7.5HP / 240V-10HP / 480V-15 HP		D = 97mm

Four Pole	
Part #	Part #
<b>ECX654N.O.-</b>	<b>ECX954N.O.-</b>
\$ 88.00	\$ 130.00
77 mm wide	95 mm wide


* Coil Voltage Suffix	
* Add Suffix to Part # / AC Voltage 60 Hz	
- A	120V
- C	208 / 230V
- E	480V
- F	600V
- G	24V
* Add Suffix letter to part # Part # Example : ECX 18-A = 120 VAC Coil	

- DIN Rail Mountable
- Screw mount option
- Metal Base ECX 65 & ECX 95
- 600,000 Electrical Operations Life
- 6,000,000 Mechanical operations life
- Tolerance short circuit 5KA RMS SYM., 600V Max
- ECX18 & ECX32 available with 1N.C. Add ".01" to part#  
Part # Example ECX18.01-\*
- Six Auxiliaries Max ( 4 Max ECX 18 , 32 )
- 4°F + 122°F temperature
- 22 % + 10 % Coil Voltage (-22% does not apply to 208V)
- Ring terminal Capable.

## Type RECX Reversing AC Contactors

AC-1	AC-3(@380V)	Horse Power Ratings 3 Phase Motor		OPEN	NEMA 1 General Purpose (metal)	NEMA4X Hose Dust Tight (non metal)	NEMA 4/12 (metal)	NEMA 3R Hose + Dust Tight Outdoor (metal)
		Volts	HP					
32A	18A	200V	7 1/2	RECX 18 - *0 \$80.00	RECX 18 - *1 \$173.00	RECX 18 - *4X \$193.00	RECX 18 - *4 \$233.00	RECX 18 - *3R \$233.00
		230V	7 1/2					
		480V	10					
		600V	10					
		Volts	HP					
50A	32A	200V	10	RECX 32 - *0 \$113.00	RECX 32 - *1 \$191.00	RECX 32 - *4X \$215.00	RECX 32 - *4 \$251.00	RECX 32 - *3R \$219.00
		230V	15					
		480V	20					
		600V	20					
		Volts	HP					
80A	65A	200V	20	RECX 65 - *0 \$209.00	RECX 65 - *1 \$274.00	RECX 65 - *4X \$295.00	RECX 65 - *4 \$355.00	RECX 65 - *3R \$327.00
		230V	25					
		480V	40					
		600V	40					
		Volts	HP					
110A	95A	200V	30	RECX 95 - *0 \$349.00	RECX 95 - *1 \$459.00	RECX 95 - *4X \$495.00	RECX 95 - *4 \$497.00	RECX 95 - *3R \$463.00
		230V	30					
		480V	50					
		600V	50					
		Volts	HP					

*Coil Voltage Suffix	
* - Add Suffix	AC Voltage
-A	= 120V
-C	= 230V/208V
-E	= 480V
-F	= 600V
-D	= 380V
-G	= 24V
-H	= 280V

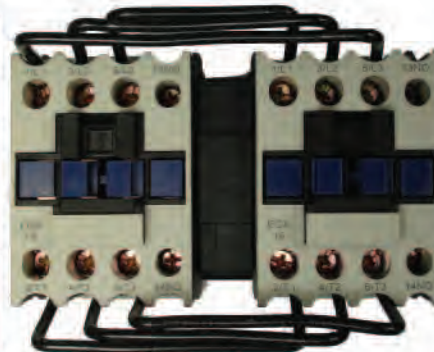

Dimensions for RECX			
mm/inches	H	x W	x D
RECX 18	76 (3.0")	105 (4.13")	87 (3.43")
RECX 32	86 (3.40")	127 (5.00")	100 (3.94")
RECX 65	129 (5.08")	165 (6.50")	116 (4.60")
RECX 95	129 (5.08")	172 (6.77")	127 (5.00")

**PART # EXAMPLE :**

RECX 18 - A1

**RECX** = RECX 18 Reversing Contactor

**A** = 120 VAC Coil

**1** = NEMA 1 Enclosure